


REVISION HISTORY		
REV	DESCRIPTION	DATE
A	RELEASE	01/30/22
B	CORRECTED MARKING INFO	04/05/22

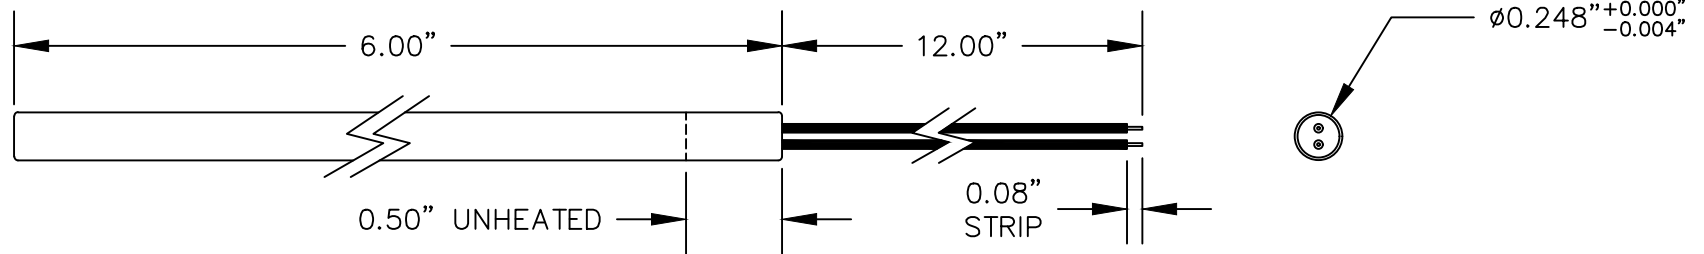

NOTES:

1. HEATER SHEATH MATERIAL: 321SS
2. SHEATH SWAGED TO FINAL DIAMETER
3. LEAD WIRES: UL1180 PTFE, 22AWG BLACK
4. WIRE EXIT END EPOXY FILLED
5. MAX OPERATING TEMPERATURE OVER HEATED LENGTH: 315°C
6. SHEATH MARKED WITH:
PART NUMBER, VOLTAGE, WATTAGE & DATE CODE (2 DIGIT YEAR FOLLOWED BY 2 DIGIT WEEK)
EXAMPLE: "CH103 120V 216W 2203"
7. ROHS COMPLIANT

VOLTAGE (V):	120	SCALE	1:1	PART NUMBER	CH103	
WATTAGE (W):	216	SHEET	1 OF 1			
WATT DENSITY (W/IN ²):	50	THIRD ANGLE PROJECTION 		TITLE	0.25" OD X 6" L CARTRIDGE HEATER	
AMPERAGE (A):	1.80					
RESISTANCE (Ω):	66.67 $\begin{smallmatrix} +10\% \\ -5\% \end{smallmatrix}$	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .X ± 0.1" .XX ± 0.01" .XXX ± 0.005" ANGULAR ± 1°		HEATERSTOCK.COM		
	NAME					DATE
DRW	JB					04/05/22
CHK	EJ					04/05/22