


REVISION HISTORY		
REV	DESCRIPTION	DATE
A	RELEASE	01/30/22
B	CORRECTED MARKING INFO	04/05/22

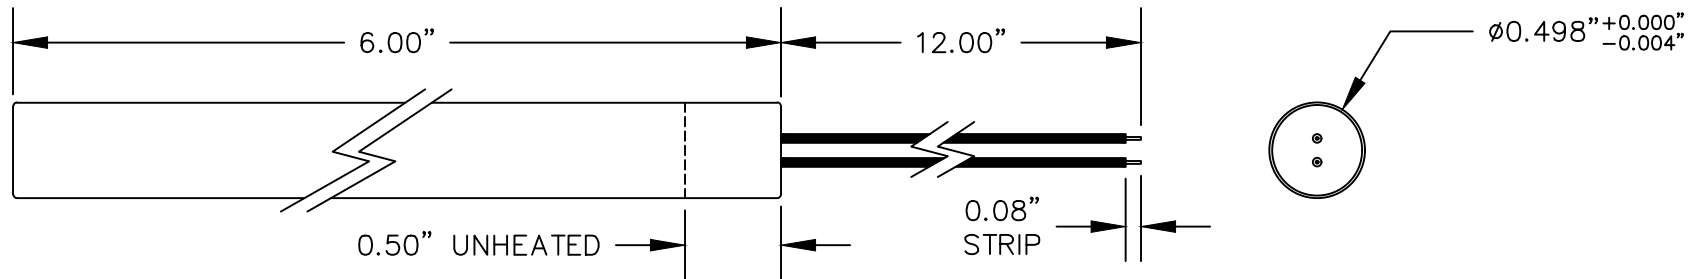

NOTES:

1. HEATER SHEATH MATERIAL: 321SS
2. SHEATH SWAGED TO FINAL DIAMETER
3. LEAD WIRES: UL1180 PTFE, 18AWG BLACK
4. WIRE EXIT END EPOXY FILLED
5. MAX OPERATING TEMPERATURE OVER HEATED LENGTH: 315°C
6. SHEATH MARKED WITH:
PART NUMBER, VOLTAGE, WATTAGE & DATE CODE (2 DIGIT YEAR FOLLOWED BY 2 DIGIT WEEK)
EXAMPLE: "CH108 120V 432W 2203"
7. ROHS COMPLIANT

VOLTAGE (V):	120	SCALE	1:1	PART NUMBER	CH108	
WATTAGE (W):	432	SHEET	1 OF 1			
WATT DENSITY (W/IN ²):	50	THIRD ANGLE PROJECTION 		TITLE	0.50" OD X 6" L CARTRIDGE HEATER	
AMPERAGE (A):	3.60					
RESISTANCE (Ω):	33.34 $\pm 10\%$ 5%	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		HEATERSTOCK.COM		
	NAME					DATE
DRW	JB					04/05/22
CHK	EJ	04/05/22	.X	$\pm 0.1"$		
			.XX	$\pm 0.01"$		
			.XXX	$\pm 0.005"$		
			ANGULAR	$\pm 1'$		